




INDUSTRIAL SCALES

COIL WEIGHING SCALES





- EC type approval
- Various Sizes and Capacities
- Stroke resistant steel construction
- Easy loading with crane
- Possibility to communicate with computer and controllers
- Printing Ticket and - Label through printer connection
- Reporting and recording opportunities

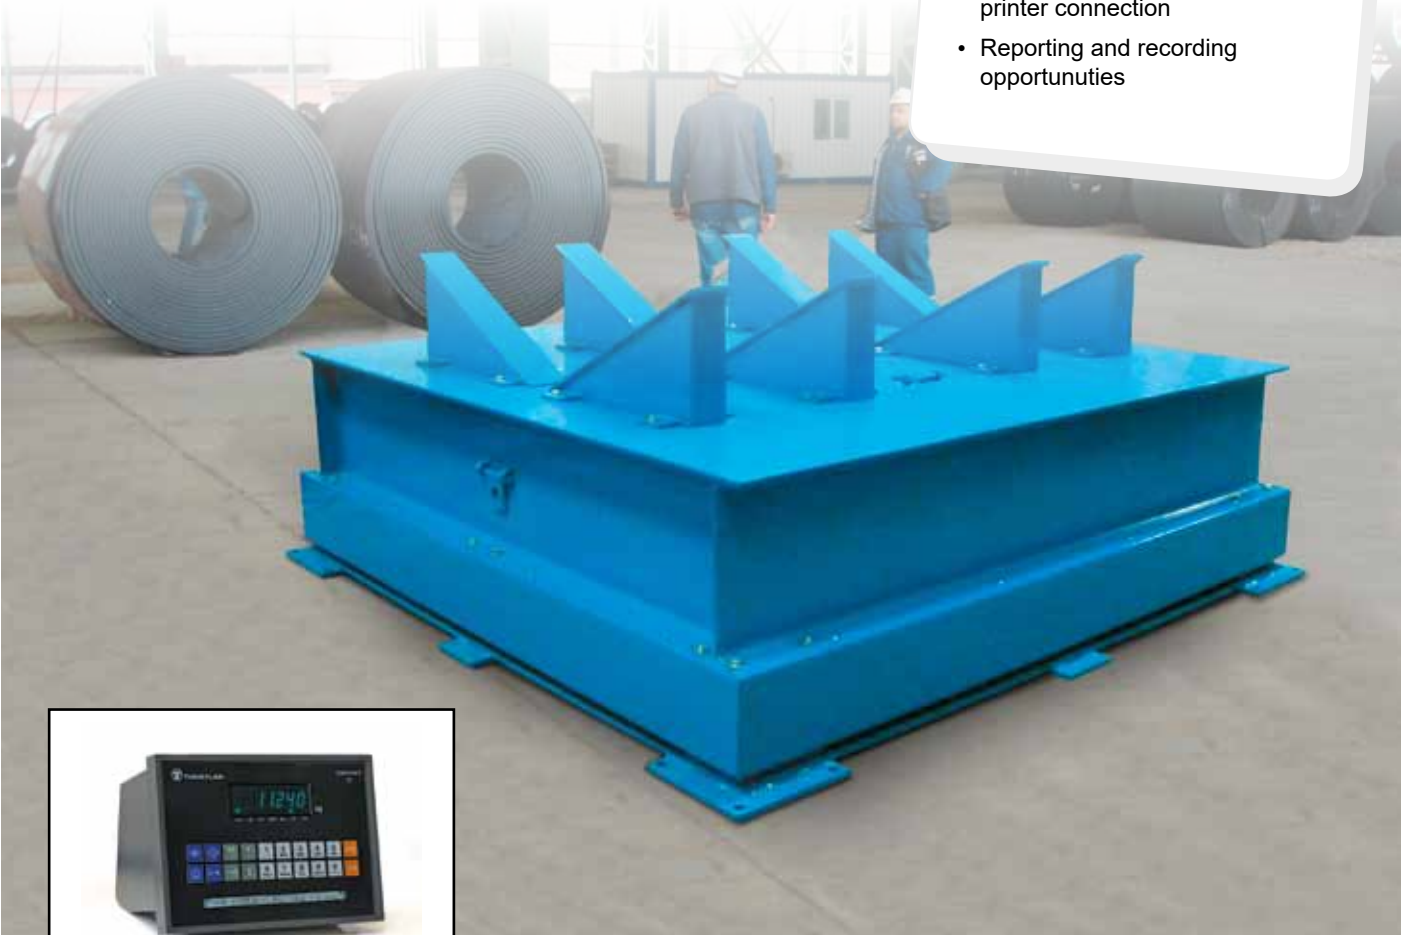

Coil weighing scales are designed for weighing products manufactured in roll form. It is often used in iron and steel and paper industry. V guide is standard property for all types of coil weighing scales which have different sizes and capacities between 3 to 50 tons. This type of scale operates harsh and tough working conditions many years without any problem with its robust and impact –resistance steel structure.

Beside to their basic features like tare, automatic, semi-automatic zero, easily readable VFD display and RS 232 serial communication output, they also have many additional weighing functions which enable ticket and label print outs through thermal, ribbon, dot matrix and barcode type printer connections. For dosing and automation applications, platform scales have various interfaces and control outputs. For explosive and environments ex-proof models are also available. By connection with Computer or Industrial PC based terminal, platform scales

COIL WEIGHING SCALES

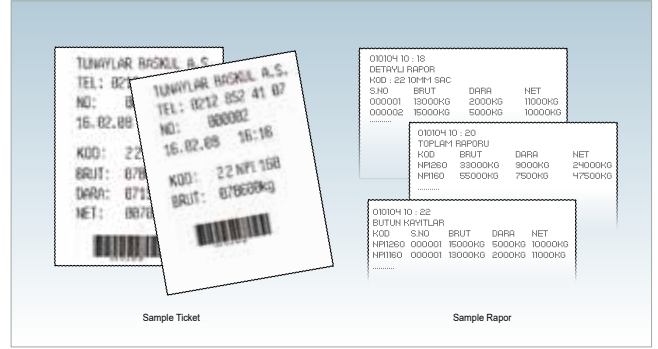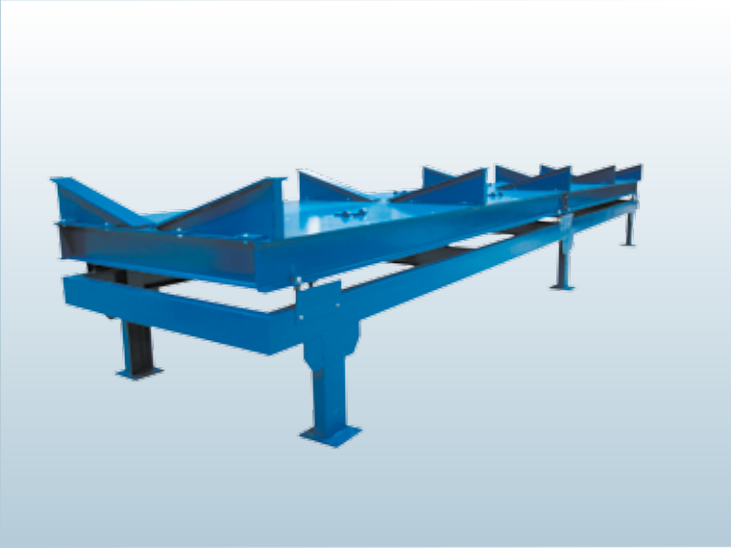

TECHNICAL SPECIFICATIONS

PLATFORM	
Model	WP-B
Material	Steel
Environmental Protection	IP 65 (Standart) - IP 67 / IP 68 (Option)
Load cell	4 / 6 pcs, OIML R60 C3 Class
Load cell Protection Class	Steel IP 67 (Standard) / Stainless Steel IP 68 (Option)

WEIGHT INDICATOR	
Model	LL3
Class	III / IIII
Caseing	Aluminium Cast (Standard) Stainless Steel (Option)
Protection Class	IP 54 / IP 65
Display	7 Dijit, 14 mm. VFD
Status - Metric Symbols	Zero, Net, Weight Range, Stand Still Load - kg
Keypad	Membran type, 20 functional alphanumeric keys (Programming, Calibration, Zero, Tare, Printing, Reporting)
Operation Voltage	220 VAC / 12 VDC
Operation Temp. Range	- 10°C ... + 40°C
Serial Communication	RS232
Options	- 2 x RS232, 2 x RS 422/485 - Modbus RTU - Wireless Communication - 0-10V / 0-20mA / 4-20 mA Analog Output - Optoizole 4 Input (5 VDC-PNP Logic-) / 4 TTL, 1 A/24 VDC or 0.5 A/125 VAC Relay Output - 2MB. (105.000 Record) Alibi Memory

CAPACITIES AND DIMENSIONS

MODEL CODE	CAPACITY X DIVISION	DIMENSION
WP-B-150X150-15000K.4L	15 ton X 5 kg	150 X 150 cm
WP-B-200X200-15000K.4L		200 X 200 cm
WP-B-250X250-15000K.4L		250 X 250 cm
WP-B-150X150-30000K.4L	30 ton X 10 kg	150 X 150 cm
WP-B-200X200-30000K.4L		200 X 200 cm
WP-B-250X250-30000K.4L		250 X 250 cm
WP-B-150X150-40000K.4L	40 ton X 20 kg	150 X 150 cm
WP-B-200X200-40000K.4L		200 X 200 cm
WP-B-250X250-40000K.4L		250 X 250 cm

* Custom desing dimensions and capaties can produced.

OPTIONS



LL2-WT-L Weighing Terminal



Touch-Operated Weighing Terminal



Printer



Indicator Connector Column



Remote Display



Wireless Communication



Tunaylar Baskül Sanayi ve Ticaret A.Ş.

Akçaburgaz Mah. 3124 Sok. No:10 Esenyurt, İstanbul - TURKEY Tel: +90 444 41 14 - Fax: +90 212 886 39 15
www.tunaylar.com tunaylar@tunaylar.com